

HONDA TSUSHIN KOGYO CO., LTD. TOKYO JAPAN	Sheet	1 of 4		
	Date	Jan.13.2005		
PRODUCT SPECIFICATION  SERIAL ATA CONNECTOR	Approved by	Checked by	Written by	
	<i>K. Ohnishi</i> K. Ohnishi	<i>K. Kasai</i> K. Kasai	<i>M. Kasahara</i> M. Kasahara	
	△	MAY.26.2005	M.K	Add HSA-SP22SFDHG
	LTR.	Date	By	Description

Connector part number

Connector part number	Description
HSA-SP22SFYG	vertical SMT host receptacle connector
HSA-SP22SFDHG △	vertical DIP host receptacle connector(Extended Heigt)
HSA-SP34LMYZAG	right-angle SMT plug connector


CHARACTERISTICS

No.	Item	Specification
1	Current rating	S-ATA Area: 1.5 A DC maximum per contact 2mm pitch connector Area: 1A DC maximum per contact
2	Voltage rating	100 V AC (r.m.s.)
3	Operating temperature	-20 °C to 85 °C
4	Storage temperature	-20 °C to 85 °C
5	Humidity	95 % RH maximum
6	Insulation resistance	When tested in accordance with of EIA 364-21, the insulation resistance shall be a minimum of 1000 MΩ after test at 500 V DC for a minute.
7	Dielectric withstanding voltage	When tested in accordance with Method B of EIA 364-20 , there shall be no breakdown of insulation or flashover at 500 V AC (r.m.s) for a minute.
8	Contact resistance (Low level) <S-ATA Area>	When tested in accordance with EIA 364-23, the contact resistance shall not exceed 50 mΩ including the conductor resistance. After test, change in the contact resistance shall not be more than 15 mΩ.

No.	Item	Specification
9	Insertion force <S-ATA Area>	The force required to insert connector into the mating one shall not exceed 20N .
10	Removal force <S-ATA Area>	The force required to withdraw connector from the mating one shall not be less than 5N.
11	Durability <S-ATA Area>	When subjected to 500 cycles of insertion and withdrawal with mating connector at the rate of 200 cycles per hour, there shall be no evident damage to the connector such as cracking. After the test, the change in the contact resistance shall not exceed 15 mΩ.
12	Random Vibration	When tested in accordance with EIA 364-28, Condition V Test letter A (Frequency: 50 Hz to 2000 Hz) there shall be no physical damage to the connector. During vibration, there shall be no discontinuity of the test circuit greater than 1 micro sec. (100 mA DC of current is applied to the circuit.) S-ATA Area:After the test, the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the with out evidence of deformation or other physical damage.
13	Physical Shock	When tested in accordance with EIA 364-27, Test condition H (h-sine wave, Acceleration: 294 m/s <sup>2</sup> , Normal duration: 11 msec.), there shall be no physical damage to the connector. During the test, there shall be no discontinuity of the test circuit greater than 1 micro sec. (100 mA DC of current is applied to the circuit.) S-ATA Area:After the test, the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the with out evidence of deformation or other physical damage.
14	Humidity	When tested in accordance with Method II of EIA 364-31 , Test condition A (Temperature: 40 °C, Humidity: 90 to 95 %RH, Test time: 96 hours) with the mating connector engaged. S-ATA Area:After the test, the insulation resistance shall be a minimum of 1000 Mohms, there shall be no breakdown of insulation or flashover at 500 VAC (r.m.s) for a minute and the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the insulation resistance shall be a minimum of 1000 Mohms, there shall be no breakdown of insulation or flashover at 500 VAC (r.m.s) for a minute.
15	Thermal shock	When tested in accordance with EIA 364-32 , Test Condition I (Subject mated connectors to 10 cycles between -55° C and +85° C) , there shall be no evident physical damage to the connector. S-ATA Area:After the test, the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the with out evidence of deformation or other physical damage.

No.	Item	Specification
16	Temperature life	When tested in accordance with Method A of EIA 364-17 , Test Condition III (Temperature: 85 °C, Test time: 500 hours), there shall be no evident physical damage to the connector. S-ATA Area: After the test, the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the with out evidence of deformation or other physical damage.
17	Mixed flowing gas	When tested in accordance with EIA 364-65, Class 2A , there shall be no any excessive corrosion on the every part of connector. S-ATA Area: After the test, the change in the contact resistance shall not exceed 15 mΩ. 2mm pitch connector Area: After the test, the with out corrosion of the contact.
18	Solderability	In the following condition, there shall be no any excessive thermal damage on the every part of connector. Soldering  Re-flow soldering: Temperature : 250 °C ± 5 °C (Peak) for 5 seconds, 220 °C for 30 seconds (MAX.)

Re- flow soldering temperature profile

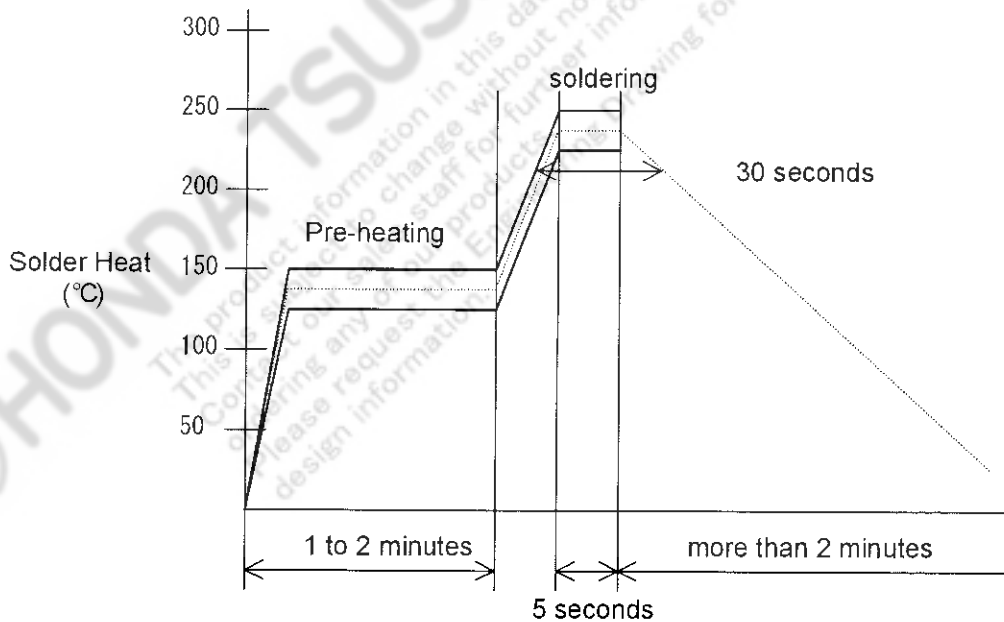

No.	Item	Specification
19	Mated connector impedance (Signal receptacle, Device plug) <S-ATA Area>	When measured the maximum and minimum values of the near end connector differential impedance by a time domain reflectometer (input risetime : 70 ps (20%-80%)), the differential impedance shall be a minimum of 85 ohms, a maximum of 115 ohms.(100 ohm +/- 15%)
20	Insertion loss(differential) (Signal receptacle, Device plug) <S-ATA Area>	When measured the differential Insertion loss by a network analyzer (Frequency : 10 to 4500 MHz), the connector absolute differential Insertion loss shall be a maximum of 6 dB.



**HONDA** TSUSHIN KOGYO CO., LTD.

The product information in this data is for reference only.  
 This is subject to change without notice.  
 Contact our sales staff for further information before considering or  
 ordering any of our products.  
 Please request the Engineering Drawing for the most current and accurate  
 design information.