

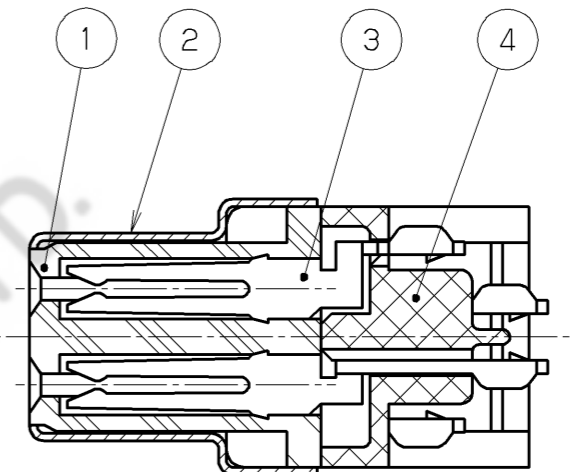


MARKING: P/N (REVERSE SIDE) DATE CODE (REVERSE SIDE)

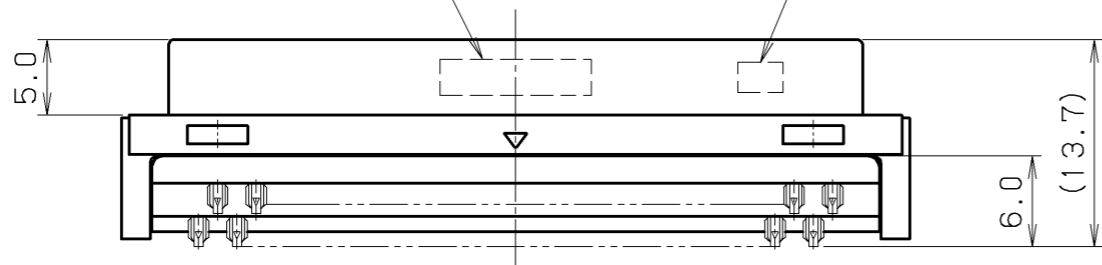

NOTE 1. CONTACT PLATING
 GOLD (0.2 μm MIN.) ON MATING AREA,
 GOLD (0.05 μm MIN.) ON TERMINATION AREA,
 ALL OVER NICKEL UNDERPLATED.

2. SUITABLE CABLE
 : AWG#20 MAX.

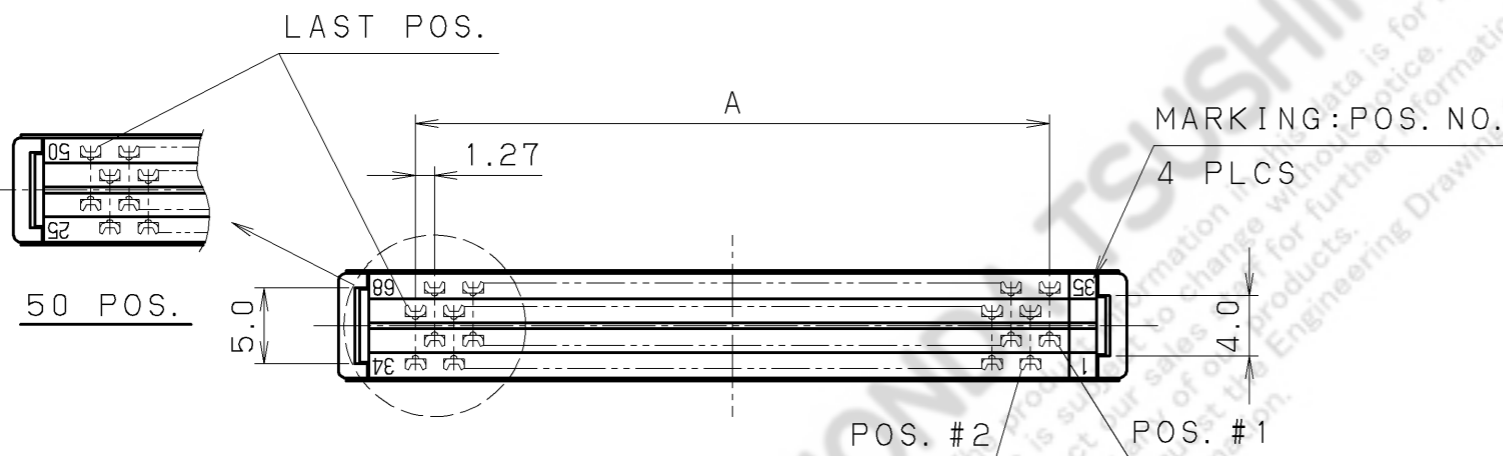

PCS-E68FS+	68	52.1	1.27x (34-1) =41.91	45.88	HONDA PCS-E68FS	1, 34, 35, 68
PCS-E50FS+	50	40.7	1.27x (25-1) =30.48	34.45	HONDA PCS-E50FS	1, 25, 26, 50
PCS-E36FS+	36	31.8	1.27x (18-1) =21.59	25.56	HONDA PCS-E36FS	1, 18, 19, 36
PCS-E28FS+	28	26.7	1.27x (14-1) =16.51	20.48	HONDA PCS-E28FS	1, 14, 15, 28
PCS-E20FS+	20	21.65	1.27x (10-1) =11.43	15.4	HONDA PCS-E20FS	1, 10, 11, 20
PART NO.	NO. OF POS.	A	B	C	PART NO.	POS. NO.
DIMENSIONS				MARKING		

4	SPACER	PBT (GF)	2	UL94V-0 BLACK						
3	CONTACT	PHOSPHOR BRONZE	NO. OF POS.	NOTE # 1						
2	SHELL	STEEL	1	Ni PLATING						
1	INSULATOR	PBT (GF)	1	UL94V-0 BLACK						
LTR.	DATE	BY	REV.	DESCRPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE		SCALE		UNIT	3RD. A. P					
MAR. 31. 2004		2 / 1		mm (INCH)	HONDA TSUSHIN KOGYO CO., LTD.					
APP. DATE & REV.					NAME		PCS-E TYPE FEMALE CONNECTOR (RoHS)			
DR.	DE.	CHK.	CHK.	APP.	PART NO.	PCS-E () FS+			REV.	
T. KAWANO	T. KAWANO	T. SOGO	K. HOMMA	K. SATO						