



CONTACT DETAIL (5/1)

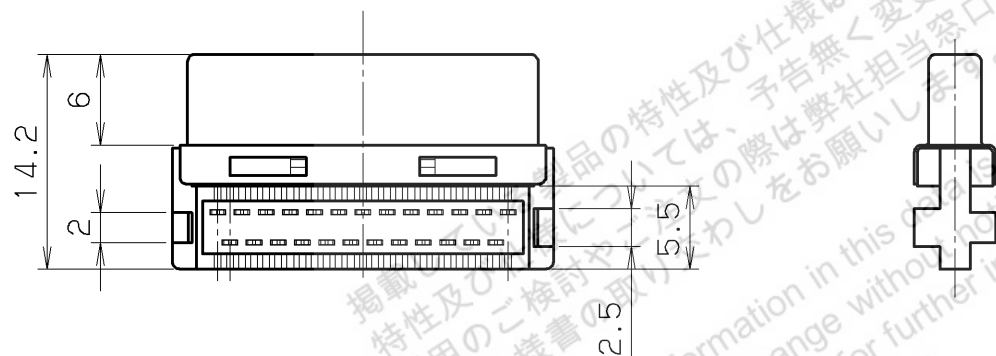

- NOTE 1. CONTACT PLATING
 GOLD 0.76μm MIN. ON MATING AREA,
 GOLD 0.05μm ON TERMINATION AREA,
 ALL OVER NICKEL 1μm MIN. UNDERPLATED.
2. APPLICABLE CONNECTOR AND COVER
 HDR-E50MAG1+, HDR-E50MSG1+
 HDR-E () LP ()
3. ASS'Y TOOLS
 FHAT-0029: PROTRUDE WIRE CUT
 FHPT-923B: IDC PRESS
4. SPECIFICATION
 RATED CURRENT 0.5A
 RATED VOLTAGE 125V AC (r. m. s.)
5. APPLICABLE WIRE SIZE
 30AWG (7/0.1) INSULATION O. D Ø0.58

掲載製品の特性及び仕様は参考値です。予告無く変更する場合があります。
 特性及び仕様のご検討やお問い合わせの際は弊社担当窓口までお問い合わせのうえ、
 採用のご検討の取扱いをお願いいたします。
 The product information in this drawing is for reference only.
 This is subject to change without notice.
 Please request Engineering Drawing for the most current and accurate design information.

				5	CABLE HOUSING	PBT	2		UL94V-0 SEE TABLE
				4	SPACER	PBT	2		UL94V-0 BLACK
				3	INSULATOR	PA9T	1		UL94V-0 BLACK
				2	SHELL	STEEL	1	NICKEL PLATING	—
				1	FEMALE CONTACT	PHOSPHOR BRONZE	50	NOTE#1	—

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	Aug. 31 2015		2/1							
DATE						SCALE	UNIT	3RD. A. P		
APP. DATE & REV.										
DR.	DE.	CHK.	CHK.	APP.	NAME		0.8mm SPACING SHIELDED BOARD TO CABLE FEMALE CONNECTOR (IDC)			
S. MURAKAMI	S. MURAKAMI	S. WATANABE	—	Y. KATO	PART NO.		HDR-E50FAG1+			