



CONTACT DETAIL (5/1)

TYPE NAME OF SYMBOL
AND LOT No. (DATE)
(SEE TABLE)

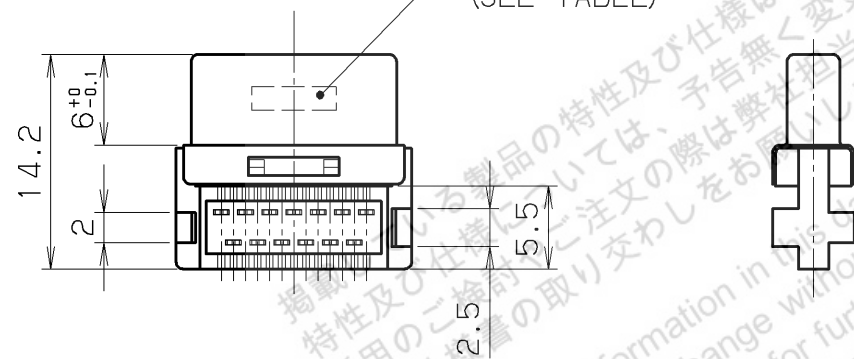

- NOTE 1. CONTACT PLATING
GOLD 0.76μm MIN. ON MATING AREA,
GOLD 0.05μm ON TERMINATION AREA,
ALL OVER NICKEL 1.5μm MIN. UNDERPLATED.
2. APPLICABLE CONNECTOR AND COVER
HDR-EA () LMY () G1-SLE+, HDR-E () LP ()
3. ASS'Y TOOLS
FHAT-0004A: PROTRUDE WIRE CUT
FHPT-0004A: IDC PRESS
4. SPECIFICATION
RATED CURRENT 0.5A (PEAK TO PEAK 1A) / 1 CONTACT
RATED VOLTAGE 125V AC (r. m. s.)

| PART NO. | APPLICABLE WIRE SIZE | TYPE NAME SYMBOL | CABLE HOUSING COLOR |
|-----------------|---|------------------|---------------------|
| HDR-E () FG1+ | 28AWG (7/0.127) INSULATION O.D Ø0.58 | FG1 | BLACK |
| HDR-E () FAG1+ | 30AWG (7/0.1) INSULATION O.D Ø0.58 | FAG1 | BLACK |
| HDR-E () FBG1+ | 32AWG (7/0.08) INSULATION O.D Ø0.44 | FBG1 | GLAY |

| LTR. | DATE | BY | REV. | DESCRPT | No. | PART NAME | MATERIAL | QTY | FINISH | NOTE |
|------|--------------------------|----|--------------|-------------------|-----------|-------------------------------|--|------|-------------------|----------------------|
| | | | | | 5 | CABLE HOUSING | PBT | 2 | | UL94V-0 SEE TABLE |
| | | | | | 4 | SPACER | PBT | 2 | | UL94V-0 BLACK |
| | | | | | 3 | INSULATOR | PBT | 1 | | UL94V-0 BLACK |
| | | | | | 2 | SHELL | STEEL | 1 | NICKEL PLATING | — |
| | | | | | 1 | FEMALE CONTACT | PHOSPHOR BRONZE | n | NOTE#1 | — |
| | DATE Mar. -29 2004 | | SCALE 2/1 | UNIT mm (INCH) | 3RD. A. P | HONDA TSUSHIN KOGYO CO., LTD. | | | | |
| | APP. DATE&REV. | | | | | DR. | DE. | CHK. | CHK. | APP. |
| | | | | | | Y. KATO | Y. KATO | — | C. NUNOKAWA | H. EBIHARA |
| | | | | | | NAME | 0.8mm SPACING SHIELDED BOARD TO CABLE FEMALE CONNECTOR (IDC) | | | |
| | | | | | | PART NO. | HDR-E () F () G1+ | | | |

| PART No. | A | B | C |
|------------------|------|------------|------|
| HDR-E26F () G1+ | 15.6 | 0.8x12=9.6 | 13.6 |
| HDR-E14F () G1+ | 10.8 | 0.8x6=4.8 | 8.8 |