


CONTACT DETAIL

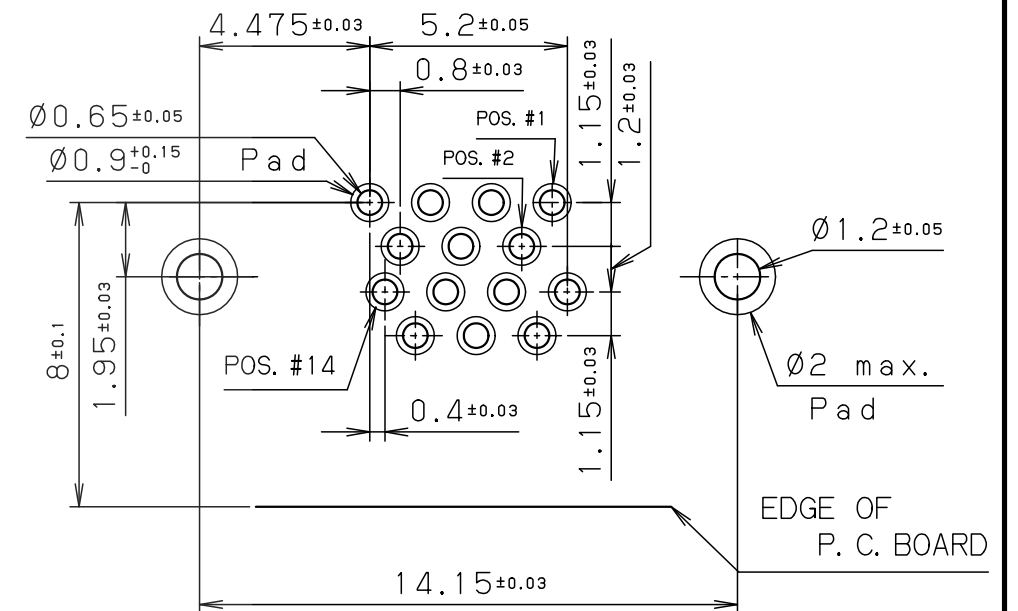

RECOMMENDED P. C. B. LAYOUT
(MOUNT SIDE VIEW)

(t=1.6 SCALE=5/1)

NOTE
 1. CONTACT PLATING
 MATING AREA: 0.76 MICRO METERS MINIMUM GOLD PLATING
 TERMINATION AREA: 0.05 MICRO METERS MINIMUM GOLD PLATING
 UNDERPLATING: NICKEL PLATING
 2. MATING CONNECTOR
 HDR-E14MAG1+
 3. SPECIFICATION
 RATED CURRENT 0.5A
 RATED VOLTAGE 125V AC (r. m. s.)

5	BOARD LOCK PIN	PHOSPHOR BRONZE	2	NICKEL PLATING	—
4	BRACKET	PPS (GF)	1	—	UL94V-0 BLACK
3	FEMALE CONTACT	PHOSPHOR BRONZE	14	NOTE. #1	—
2	INSULATOR	PA9T (GF)	1	—	UL94V-0 BLACK
1	SHELL	STEEL	1	NICKEL PLATING	—

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
	DATE		SCALE		UNIT					
	Jan. 12. 2006		2 / 1		mm (INCH)					
	APP. DATE & REV.				3RD. A. P		HTK HONDA TSUSHIN KOGYO CO., LTD.			
	DR.	DE.	CHK.	CHK.	APP.	NAME	0.8mm SPACING RIGHTANGLE FEMALE CONNECTOR			
	M. KASAHARA	M. KASAHARA	—	—	Y. KATO	PART NO.	HDR-EC14LFDNT+		REV.	